





IVM 60/30

Robust middle-class industrial vacuum cleaner IVM 60/30 with durable side channel blower and large star filter in dust class M. Suitable for the removal of fine and coarse solid materials.



1 User-friendly machine handling

- Hose hook and accessory storage for simple storage and carrying.
- Integrated cable hook for secure cable storage.

2 Manual filter vibration for low operating costs


- Extends the service life of the continuous filter, thus reducing the maintenance effort.
- Comfortable: a transmission ensures constantly identical cleaning results.

3 Resilient and versatile

- Side channel blower with service life of over 20,000 hours for high suction power.
- Suitable for multiple shift operation.

4 Waste container with set-down mechanism

- For ergonomic emptying also with difficult suction material.

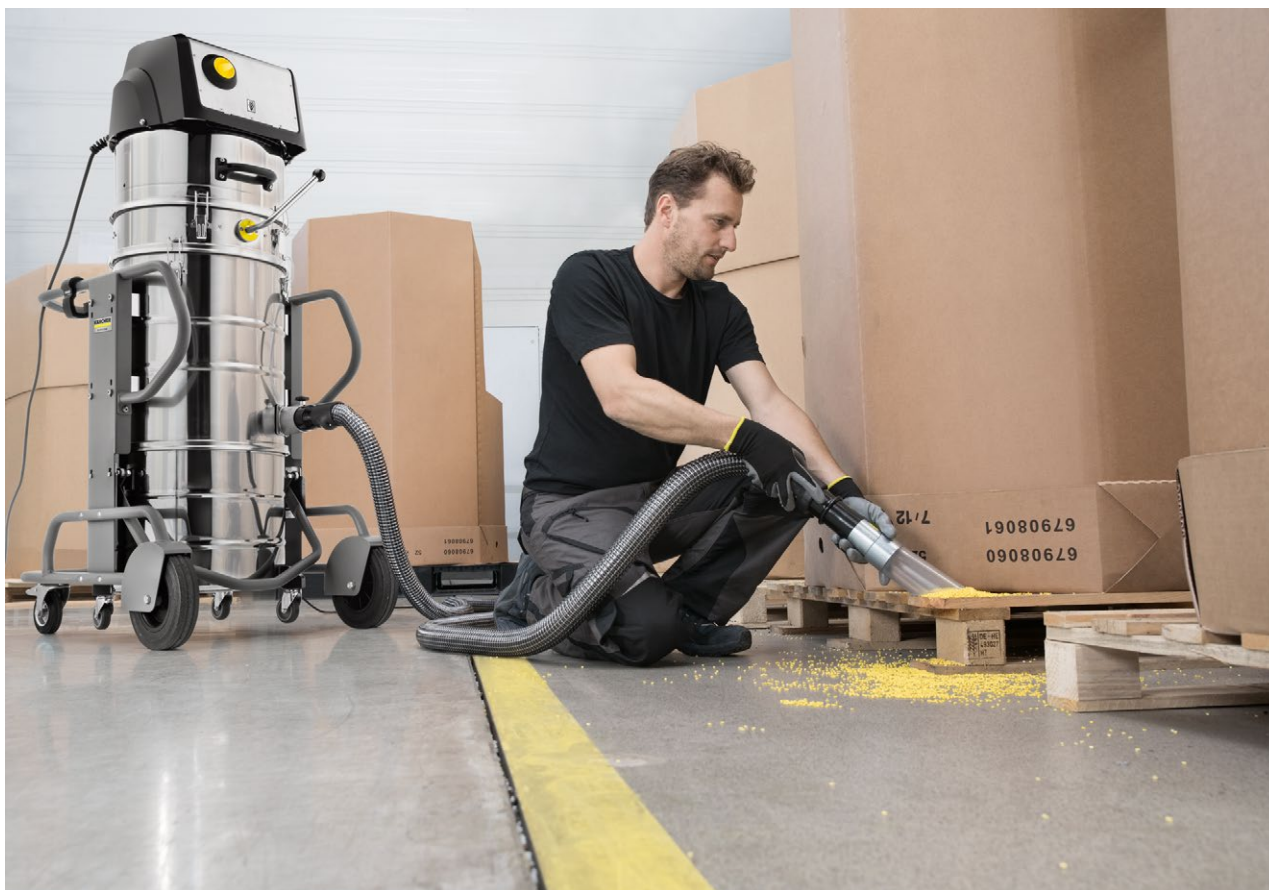

IVM 60/30

- Anti-static equipment
- Extra-large filter area
- Robust wheels and castors

Technical data

Order no.		1.573-520.0
EAN code		4054278325699
Supply voltage	Ph / V / Hz	3 / 400 / 50
Air flow	l/s / m³/h	68 / 244.8
Vacuum	mbar / kPa	286 / 28.6
Container content	l	60
Rated input power	kW	3
Vacuuming type		Electric
Filter areas	m²	2.2
Connection nominal diameter		ID 70
Accessory nominal diameter		ID 70 / ID 50 / ID 40
Sound pressure level	dB(A)	79
Weight	kg	99
Dimensions (L x W x H)	mm	1030 × 680 × 1650

Equipment

Accessories included in the scope of delivery	no
--	----

IVM 60/30

1.573-520.0

KÄRCHER



		Order no.	Quantity	ID	Length / width	Price	Description	
Reducers/expanders								
Reduction DN70 to DN50	1	9.977-772.0		DN 70				☐
Reduction DN70 to DN40	2	9.989-690.0		DN 70			Electroconductive steel reducer for reduction from DN 70 to DN 40.	☐
Stainless steel reducer DN 70 to DN 50	3	9.989-712.0		DN 70				☐
Stainless steel reducer DN 70 to DN 40	4	9.989-713.0		DN 70				☐
Reduction in AISI 304 stainless steel	5	9.989-893.0		DN 50				☐
Distributor								
Y-piece fitting DN70 to DN50	6	9.989-611.0		DN 70			Electroconductive steel fitting, DN 70/DN 50 / DN 50.	☐
AISI 304 stainless steel manifold	7	9.989-894.0		ID 50 mm				☐
	8	9.989-895.0		ID 40 mm				☐
PVC								
Hose PVC DN40 3 m	9	9.989-647.0		DN 40			PVC hose, DN 50. Temperature-resistant up to 85 °C and electroconductive. Length: 3 m.	☐
Hose PVC DN40 5 m	10	9.989-614.0		DN 40			Electroconductive PVC hose, DN 40. Temperature-resistant up to 85 °C. Length: 5 m.	☐
PVC hose DN40 15 m without connectors	11	9.989-633.0		DN 40			PVC hose without tap adapter, DN 40. Electroconductive and temperature-resistant up to 85 °C. Length: 15 m.	☐
Hose PVC DN50 3 m	12	9.989-615.0		DN 50			Electroconductive PVC hose, DN 50. Temperature-resistant up to 85 °C. Length: 3 m.	☐
Hose PVC DN50 5 m	13	9.989-616.0		DN 50			Electroconductive PVC hose, DN 50. Temperature-resistant up to 85 °C. Length: 5 m.	☐
PVC hose DN50 15 m without connectors	14	9.989-634.0		DN 50			PVC hose without tap adapter, DN 50. Electroconductive and temperature-resistant up to 85 °C. Length: 15 m.	☐
Hose PVC DN40 1 m	15	9.989-626.0		DN 40			Electroconductive PVC hose, DN 40. Temperature-resistant up to 85 °C. Length: 1 m.	☐
Hose PVC DN40 3 m	16	9.989-962.0		ID 40 mm				☐
Hose PVC DN40 5 m	17	9.989-963.0		ID 50 mm				☐
Hose PVC DN50 3 m	18	9.989-964.0		ID 50 mm				☐
Hose PVC DN50 5 m	19	9.989-965.0		ID 50 mm				☐
EVA								
Hose EVA NW40 3 m	20	9.988-088.0		DN 40			Electroconductive hose with NW 40. Suitable for temperatures up to 65°C. Length: 3 m.	☐
Hose EVA NW40 5 m	21	9.988-089.0		DN 40			Five-metre-long, electroconductive hose with NW 40. Suitable for temperatures up to 65°C. Length: 5 m.	☐
EVA hose DN40 15 m without connectors	22	9.989-630.0		DN 40			EVA hose without tap adapter, DN 40. Electroconductive and temperature-resistant up to 65 °C. Length: 15 m.	☐
Hose EVA NW50 3 m	23	9.988-090.0		DN 50			Electroconductive hose with NW50. Suitable for temperatures up to 65°C. Length: 3 m.	☐
Hose EVA NW50 5 m	24	9.988-091.0		DN 50				☐
EVA hose DN50 15 m without connectors	25	9.989-631.0		DN 50			EVA hose without tap adapter, DN 50. Electroconductive and temperature-resistant up to 65 °C. Length: 15 m.	☐
Hose EVA DN40 3 m	26	9.989-982.0		ID 40 mm				☐
Hose EVA DN40 5 m	27	9.989-983.0		ID 40 mm				☐
Hose EVA DN50 3 m	28	9.989-984.0		ID 50 mm				☐
Hose EVA DN50 5 m	29	9.989-985.0		ID 50 mm				☐
Hose installation set								
Hose installation kit DN40	30	9.989-627.0		DN 40			Multipiece hose connection set, DN 40.	☐
Hose installation kit DN50	31	9.989-628.0		DN 50			Multipiece hose connection kit, DN 50.	☐

☐ Available accessories.

IVM 60/30

1.573-520.0

KÄRCHER



		Order no.	Quantity	ID	Length / width	Price	Description	
Hose connection kit DN40	32	9.989-986.0		ID 40 mm				☐
Hose connection kit DN50	33	9.989-987.0		ID 50 mm				☐
PU								
Hose PU DN40 3 m	34	9.989-617.0		DN 40			Oil-resistant, electroconductive PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 3 m.	☐
Hose PU DN40 5 m	35	9.989-618.0		DN 40			Oil-resistant, electroconductive PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 5 m.	☐
PU hose DN40 15 m without connectors	36	9.989-637.0		DN 40			PU hose without tap adapter, DN 40. Electroconductive and temperature-resistant up to 80 °C. Length: 15 m.	☐
Hose PU DN50 3 m	37	9.989-619.0		DN 50			Oil-resistant, electroconductive PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 3 m.	☐
Hose PU DN50 5 m	38	9.989-620.0		DN 50			Oil-resistant, electroconductive PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 5 m.	☐
PU hose DN50 15 m without connectors	39	9.989-638.0		DN 50			PU hose without tap adapter, DN 50. Electroconductive and temperature-resistant up to 80 °C. Length: 15 m.	☐
Hose PU DN40 3 m	40	9.989-966.0		ID 40 mm				☐
Hose PU DN40 5 m	41	9.989-967.0		ID 40 mm				☐
Hose PU DN50 3 m	42	9.989-968.0						☐
Hose PU DN50 5 m	43	9.989-969.0		ID 50 mm				☐
Hose PU FDA DN40 3 m	44	9.989-970.0		ID 40 mm				☐
Hose PU FDA DN40 5 m	45	9.989-971.0		ID 40 mm				☐
Hose PU FDA DN40 15 m	46	9.989-972.0		ID 40 mm				☐
Hose PU FDA DN50 3 m	47	9.989-973.0		ID 50 mm				☐
Hose PU FDA DN50 5 m	48	9.989-974.0		ID 50 mm				☐
Hose PU FDA DN50 15 m	49	9.989-975.0		ID 50 mm				☐
ME-PU								
Hose ME DN40 3 m	50	9.989-976.0		ID 40 mm				☐
Hose ME DN40 5 m	51	9.989-977.0		ID 40 mm				☐
Hose without connection ME DN40 15 m	52	9.989-978.0		ID 40 mm				☐
Hose ME DN50 3 m	53	9.989-979.0		ID 50 mm				☐
Hose ME DN50 5 m	54	9.989-980.0		ID 50 mm				☐
Hose without connection ME DN50 15 m	55	9.989-981.0		ID 50 mm				☐
Handles								
Handle DN 40	56	9.977-679.0		DN 40			45° curved and electroconductive handle made from stainless steel. Inner cone DN 40.	☐
Handle DN 50	57	9.977-678.0		DN 50			Electroconductive and 45° curved handle made from stainless steel. Inner cone DN 50.	☐
Stainless steel handle NW40	58	9.989-036.0		DN 40			Curved and electroconductive handle made from stainless steel. Angle 45°, inner cone NW 40.	☐
Stainless steel handle NW50	59	9.988-111.0		DN 50			Curved and electroconductive handle made from stainless steel. Angle 45°, inner cone NW 50.	☐
Elbow aluminium 45° DN40	60	9.989-544.0					45° curved handle made from aluminium, DN 40.	☐
Elbow aluminium 45° DN50	61	9.989-547.0					Handle with 45° bend. Made from aluminium, DN 50.	☐

☐ Available accessories.

IVM 60/30

1.573-520.0

KÄRCHER



		Order no.	Quantity	ID	Length / width	Price	Description	
Handle stainless steel AISI 304	62	9.989-896.0		ID 40 mm				☐
	63	9.989-897.0		ID 50 mm				☐
Handle straight stainless steel AISI 304	64	9.989-898.0		ID 40 mm				☐
	65	9.989-899.0		ID 50 mm				☐
Handle carbon DN-F40	66	9.989-916.0		ID 40 mm				☐
Handle carbon DN-F50	67	9.989-917.0		ID 50 mm				☐
Handle carbon 110° DN-F40	68	9.989-918.0		ID 40 mm				☐
Handle carbon 110° DN-F50	69	9.989-919.0		ID 50 mm				☐
Suction tubes								
Suction tube 850 mm DN 40	70	9.977-525.0		DN 40			Steel extension tube, electroconductive, DN 40. Length: 850 mm.	☐
	71	9.977-531.0		DN 50			850 mm long extension tube made from steel. Electroconductive and with inner cone DN 50.	☐
Aluminium suction tube 1500 mm NW40	72	9.989-038.0		DN 40			Stainless steel extension tube, electroconductive, NW 50. Length: 1500 mm.	☐
Aluminium suction tube 1500 mm NW50	73	9.989-035.0		DN 50			Curved and electroconductive extension tube made from stainless steel. Angle 45°, inner cone NW 50.	☐
Stainless steel suction tube 850 mm NW40	74	9.989-039.0		DN 40			Stainless steel extension tube, electroconductive, NW 40. Length: 850 mm.	☐
Stainless steel suction tube 850 mm NW50	75	9.988-114.0		DN 50			Electroconductive extension tube made from stainless steel. Inner cone NW 50.	☐
Carbon suction tube 1500 mm DN40	76	9.989-552.0		DN 40			Very light carbon extension tube, electroconductive, DN 40. Length: 1500 mm.	☐
Carbon suction tube 1500 mm DN50	77	9.989-553.0		DN 50			Electroconductive, very light carbon extension tube. Inner cone DN 50, 1500 mm long.	☐
Suction tube stainless steel AISI 304 DN	78	9.989-912.0		ID 40 mm				☐
	79	9.989-913.0		ID 50 mm				☐
Suction tube carbon 1500 mm DN-F40	80	9.989-920.0		ID 40 mm				☐
Suction tube carbon 1500 mm DN-F50	81	9.989-921.0		ID 50 mm				☐
Suction tube aluminium high temperature	82	9.989-928.0		ID 40 mm				☐
	83	9.989-929.0		ID 50 mm				☐
	84	9.989-930.0		ID 40 mm				☐
	85	9.989-931.0		ID 50 mm				☐
	86	9.989-932.0		ID 40 mm				☐
	87	9.989-933.0		ID 50 mm				☐
Standard nozzles								
Standard PVC nozzle DN40	88	9.989-674.0		DN 40			Electroconductive standard PVC nozzle. DN 40.	☐
Standard PVC nozzle DN50	89	9.989-673.0		DN 50			Electroconductive standard PVC nozzle. DN 50.	☐
Standard nozzle silicone DN40	90	9.988-401.0		DN 40			Stretchy standard nozzle made from silicone, inner cone DN 40.	☐
Standard nozzle silicone DN50	91	9.988-402.0		DN 50				☐
Standard nozzle cuttable rubber DN40	92	9.989-677.0		DN 40			Standard nozzle, electroconductive, made from cuttable rubber. DN 40.	☐
Standard nozzle cuttable rubber DN50	93	9.989-675.0		DN 50			Standard nozzle, electroconductive, made from cuttable rubber. DN 50.	☐
Standard aluminium nozzle DN40	94	9.980-748.0		DN 40			Diagonal nozzle made from anodised aluminium, electroconductive, DN 40.	☐
Standard aluminium nozzle DN50	95	9.980-749.0		DN 50			Diagonal nozzle made from anodised aluminium, electroconductive, DN 50.	☐

☐ Available accessories.

IVM 60/30

1.573-520.0

KÄRCHER



101, 107



109



110-111



112, 115-116



113, 119



114



117-118



120

		Order no.	Quantity	ID	Length / width	Price	Description	
Standard nozzle silicon FDA blue DN-F40	96	9.989-835.0		ID 40 mm				☐
Standard nozzle silicon FDA green DN-F40	97	9.989-836.0		ID 40 mm				☐
Standard nozzle silicon FDA red DN-F40	98	9.989-837.0		ID 40 mm				☐
Standard nozzle silicon FDA transparent	99	9.989-838.0		ID 40 mm				☐
Standard nozzle silicon FDA white DN-F40	100	9.989-839.0		ID 40 mm				☐
Standard nozzle silicon FDA yellow DN-F4	101	9.989-840.0		ID 40 mm				☐
Standard nozzle silicon FDA blue DN-F50	102	9.989-841.0		ID 50 mm				☐
Standard nozzle silicon FDA green DN-F50	103	9.989-842.0		ID 50 mm				☐
Standard nozzle silicon FDA red DN-F50	104	9.989-843.0		ID 50 mm				☐
Standard nozzle silicon FDA transparent	105	9.989-844.0		ID 50 mm				☐
Standard nozzle silicon FDA white DN-F50	106	9.989-845.0		ID 50 mm				☐
Standard nozzle silicon FDA yellow DN-F5	107	9.989-846.0		ID 50 mm				☐
Flexible standard nozzles								
Standard nozzle flexible PVC DN40	108	9.981-420.0		DN 40			Electroconductive, flexible round nozzle made from galvanised steel, with rubber mouthpiece DN 30.	☐
Standard nozzle flexible PVC DN50	109	9.981-421.0		DN 50			Electroconductive, flexible round nozzle made from galvanised steel, DN 50, with rubber mouthpiece DN 30.	☐
Standard nozzle, flexible, angled 90° PP DN40	110	9.981-429.0		DN 40			Flexible, electroconductive angled nozzle, DN 40, length: 800 mm.	☐
Standard nozzle, flexible, angled 90° PP DN50	111	9.981-430.0		DN 50			Flexible, electroconductive angled nozzle, DN 50, length: 800 mm.	☐
Floor nozzles								
Aluminium floor nozzle 370 mm DN40	112	9.989-683.0		DN 40			Floor nozzle, 370 mm, made from aluminium. DN 40.	☐
Aluminium floor nozzle, el, 370 mm, DN40	113	9.989-682.0		DN 40			Floor nozzle, 370 mm, made from aluminium. Electroconductive. DN 40.	☐
Aluminium floor nozzle 200 mm DN50	114	9.981-426.0		DN 50			Floor nozzle, DN 50, with 200 mm suction width.	☐
Aluminium floor nozzle 370 mm DN50	115	9.989-664.0		DN 50			Floor nozzle. 370 mm, made from aluminium. Electroconductive. DN 50.	☐
Aluminium floor nozzle, el, 370 mm, DN50	116	9.987-612.0		DN 50			Electroconductive multi-purpose floor nozzle. 370 mm wide, DN 50.	☐
Aluminium floor nozzle 500 mm DN50	117	9.989-684.0		DN 50			Floor nozzle, 500 mm, made from aluminium. Electroconductive. DN 50.	☐
Aluminium floor nozzle, el, 500 mm, DN50	118	9.981-925.0		DN 50			Floor nozzle with 500 mm suction width and hinge. DN 50, electroconductive.	☐
Stainless steel floor nozzle el 370 mm DN40	119	9.989-558.0		DN 40			Multi-purpose floor nozzle (370 mm), electroconductive, DN 40.	☐
Stainless steel floor nozzle el 370 mm DN50	120	9.988-115.0		DN 50			Floor nozzle (370 mm) made from stainless steel, electroconductive, DN 50.	☐

☐ Available accessories.

IVM 60/30

1.573-520.0

KÄRCHER



		Order no.	Quantity	ID	Length / width	Price	Description	
Floor nozzle rubber strip oil-resistant, 220 mm	121	9.981-923.0					Squeegee with plastic strip for floor nozzle, 220 mm wide.	☐
Floor nozzle rubber strip 370 mm	122	9.981-914.0					Squeegee with profiled strip for floor nozzle, 370 mm wide.	☐
Floor nozzle rubber strip 500 mm	123	9.981-915.0					Oil-resistant squeegee with profiled strip for floor nozzle, 500 mm wide.	☐
Floor nozzle brush strip el. 370 mm	124	9.984-939.0					Electroconductive squeegee for floor nozzle, 370 mm wide.	☐
Floor nozzle brush strip 500 mm	125	9.980-764.0					Brush strip set for floor nozzle 500 mm, with profiled strip.	☐
Bottom nozzle stainless steel AISI 316L	126	9.989-861.0		ID 40 mm				☐
Bottom nozzle Edelstahl AISI 316L blue	127	9.989-862.0		ID 50 mm				☐
Floor nozzle stainless steel AISI 316L g	128	9.989-863.0		ID 40 mm				☐
	129	9.989-864.0		ID 50 mm				☐
Floor nozzle stainless steel AISI 316L r	130	9.989-865.0		ID 40 mm				☐
	131	9.989-866.0		ID 50 mm				☐
Floor nozzle stainless steel AISI 316L t	132	9.989-867.0		ID 40 mm				☐
	133	9.989-868.0		ID 50 mm				☐
Floor nozzle stainless steel AISI 316L w	134	9.989-869.0		ID 40 mm				☐
	135	9.989-870.0		ID 50 mm				☐
Floor nozzle stainless steel AISI 316L y	136	9.989-871.0		ID 40 mm				☐
	137	9.989-872.0		ID 50 mm				☐
Floor nozzle stainless steel AISI 304 40	138	9.989-914.0		ID 40 mm				☐
	139	9.989-915.0		ID 50 mm				☐
Floor nozzle stainless steel 400 mm DN-F	140	9.989-934.0		ID 40 mm				☐
	141	9.989-935.0		ID 50 mm				☐
Floor nozzle aluminium 400 mm DN-F40	142	9.989-936.0		ID 40 mm				☐
Floor nozzle aluminium 400 mm DN-F50	143	9.989-937.0						☐
Crevice nozzles								
Crevice nozzle PP 15 mm x 145 mm DN40	144	9.988-116.0		DN 40			Electroconductive, flat multi-purpose crevice nozzle made from plastic, DN 42.	☐
Crevice nozzle PP 15 mm x 145 mm DN50	145	9.988-117.0		DN 50			Electroconductive, flat multi-purpose crevice nozzle made from plastic, DN 52.	☐
Crevice nozzle PU 19 mm x 160 mm DN40	146	9.981-483.0		DN 40			Crevice nozzle made from PU, DN 40.	☐
Crevice nozzle PU 22 mm x 175 mm DN50	147	9.981-482.0		DN 50			Crevice nozzle made from PU, DN 50.	☐
Crevice nozzle 17 mm x 120 mm DN40	148	9.989-680.0		DN 40			Electroconductive crevice nozzle, 17 × 120 mm. DN 40.	☐
Crevice nozzle 25 mm x 120 mm DN40	149	9.989-678.0		DN 40			Electroconductive crevice nozzle, 25 × 120 mm. DN 40.	☐
Crevice nozzle 18 mm x 120 mm DN50	150	9.981-442.0		DN 50			Electroconductive crevice nozzle made from sheet steel, DN 50, with 17 mm slot width.	☐
Crevice nozzle 25 mm x 120 mm DN50	151	9.981-465.0		DN 50			Electroconductive crevice nozzle made from sheet steel, DN 50, with 25 mm slot width.	☐
Stainless steel crevice nozzle 17 mm x 120 mm DN40	152	9.989-193.0		DN 40			Crevice nozzle made from stainless steel, DN 50.	☐
Stainless steel crevice nozzle 22 mm x 220 mm DN50	153	9.988-123.0		DN 50			Stainless steel crevice nozzle, DN 42, suitable for use with foods.	☐

☐ Available accessories.



		Order no.	Quantity	ID	Length / width	Price	Description	
Flexible crevice nozzles								
Flexible crevice nozzle silicone 65 mm DN50	154	9.988-403.0		DN 50			Flexible crevice nozzle made from silicone, DN 50.	☐
Flexible crevice nozzle 11 mm x 58 mm DN40	155	9.989-681.0		DN 40			Electroconductive and flexible crevice nozzle, 11 x 58 mm.	☐
Flexible crevice nozzle 20 mm x 45 mm DN40	156	9.981-423.0		DN 40			Flexible and electroconductive crevice nozzle made from galvanised steel with 20 mm slot width, DN 40.	☐
Flexible crevice nozzle 12 mm x 45 mm DN50	157	9.981-424.0		DN 50			Flexible, electroconductive galvanised crevice nozzle, DN 50, with 13 mm slot width.	☐
Flexible crevice nozzle 20 mm x 45 mm DN50	158	9.981-425.0		DN 50			Flexible and electroconductive crevice nozzle made from galvanised steel with 20 mm slot width, DN 50.	☐
Crevice nozzle flexible silicone	159	9.989-847.0		ID 40 mm				☐
Standard nozzle flexible Silikon FDA tra	160	9.989-848.0		ID 50 mm				☐
Surface nozzles								
Silicone surface nozzle 120 mm DN40	161	9.988-118.0		DN 40			Electroconductive rubber nozzle, angled, DN 40, suitable for use with foods.	☐
Silicone surface nozzle 120 mm DN50	162	9.988-119.0		DN 50			Electroconductive rubber nozzle, angled, DN 50, suitable for use with foods.	☐
Aluminium surface nozzle, 150 mm, DN 40	163	9.989-666.0		DN 40			Surface nozzle, 150 mm, made from aluminium. DN 40.	☐
Aluminium surface nozzle 150 mm DN50	164	9.989-665.0		DN 50			Surface nozzle, 150 mm, made from aluminium. DN 50.	☐
Rubber nozzle silicon FDA blue DN-F40	165	9.989-849.0		ID 40 mm				☐
Standard nozzle silicon FDA blue DN-F40	166	9.989-850.0		ID 50 mm				☐
	167	9.989-851.0		ID 40 mm				☐
	168	9.989-852.0		ID 50 mm				☐
	169	9.989-853.0		ID 40 mm				☐
	170	9.989-854.0		ID 50 mm				☐
	171	9.989-855.0		ID 40 mm				☐
	172	9.989-856.0		ID 50 mm				☐
	173	9.989-857.0		ID 40 mm				☐
	174	9.989-858.0		ID 50 mm				☐
	175	9.989-859.0		ID 40 mm				☐
	176	9.989-860.0		ID 50 mm				☐
Borehole nozzles								
Blind hole nozzle DN40	177	9.989-671.0		DN 40			90° curved blind hole nozzle with 60 mm diameter.	☐
Blind hose nozzle angled 60° DN40	178	9.989-669.0		DN 40			90° curved blind hole nozzle with 48 mm diameter. DN 40.	☐
Blind hose nozzle angled 90° DN40	179	9.989-667.0		DN 40			90° curved blind hole nozzle with 60 mm diameter. DN 40.	☐
Blind hose nozzle angled 90° 200 mm extension DN40	180	9.989-670.0		DN 40			90° curved blind hole nozzle with 48 mm diameter. DN 40.	☐
Standard brushes								
Standard brush 40 mm DN40	181	9.981-431.0		DN 40			Flat brush nozzle DN 40.	☐
Standard brush 40 mm DN50	182	9.981-432.0		DN 50			Flat brush nozzle DN 50.	☐
End brushes								
End brush Ø 82 mm DN40	183	9.989-609.0		DN 40			Electroconductive end brush with 82 mm diameter. DN 40.	☐
End brush Ø 82 mm DN50	184	9.989-608.0		DN 50			Electroconductive end brush with 82 mm diameter. DN 50.	☐

☐ Available accessories.

IVM 60/30

1.573-520.0

KÄRCHER



		Order no.	Quantity	ID	Length / width		Price	Description	
Brush FDA blue ø 75 mm DN-F40	185	9.989-873.0		ID 40 mm					☐
Brush FDA blue ø 75 mm DN-F50	186	9.989-874.0		ID 50 mm					☐
Brush Nozzle FDA ø 75 mm DN-F40 green	187	9.989-875.0		ID 40 mm					☐
Brush FDA green ø 75 mm DN-F50	188	9.989-876.0		ID 50 mm					☐
Brush FDA red ø 75 mm DN-F40	189	9.989-877.0		ID 40 mm					☐
Brush FDA red ø 75 mm DN-F50	190	9.989-878.0		ID 50 mm					☐
Brush FDA white ø 75 mm DN-F40	191	9.989-879.0		ID 40 mm					☐
Brush FDA white ø 75 mm DN-F50	192	9.989-880.0		ID 50 mm					☐
Brush FDA yellow ø 75 mm DN-F40	193	9.989-881.0		ID 40 mm					☐
Brush FDA yellow ø 75 mm DN-F50	194	9.989-882.0		ID 50 mm					☐
Surface brushes									
Surface brush PP 24 mm DN40	195	9.989-610.0		DN 40				Electroconductive surface brush. DN 40.	☐
Surface brush 300 mm DN40	196	9.981-911.0		DN 40				Vacuum brush, 300 mm, with 45° connection, with star screw, horsehair bristles.	☐
Surface brush 300 mm DN50	197	9.981-912.0		DN 50					☐
Cylinder brushes									
Cylinder brush ø 100 mm F-DN40	198	9.989-922.0		ID 40 mm					☐
Cylinder brush ø 200 mm F-DN40	199	9.989-923.0		ID 40 mm					☐
Cylinder brush ø 300 mm F-DN40	200	9.989-924.0		ID 40 mm					☐
Cylinder brush ø 100 mm F-DN50	201	9.989-925.0		ID 50 mm					☐
Cylinder brush ø 200 mm F-DN50	202	9.989-926.0		ID 50 mm					☐
Cylinder brush ø 300 mm F-DN50	203	9.989-927.0		ID 50 mm					☐
Liquids/swarf									
Kit oven cleaning DN50	204	9.989-938.0		ID 50 mm					☐
Kit oven cleaning DN40	205	9.989-939.0		ID 40 mm					☐
Kit food DN40	206	9.989-940.0		ID 40 mm					☐
Kit food DN50	207	9.989-941.0		ID 40 mm					☐
Solids/dusts									
Kit overhead cleaning DN40	208	9.989-942.0		ID 40 mm					☐
Kit overhead cleaning DN50	209	9.989-943.0		ID 50 mm					☐

☐ Available accessories.